GENUINE ACCESSORIES



Thank you for purchasing this product. Before using the product, read through the user manual to ensure that you will use the product correctly.
Please keep this manual for future reference.

Features

- Wall-mount control panel for Audio-Technica ATDM-0604a and ATDM-1012/1012DAN Digital SmartMixer® systems (sold separately)
- Dedicated volume dial provides convenient hands-on level control
- Preset recall buttons give quick access to stored mixer settings
- Channel selection buttons switch between mixer-assigned channels through the Web Remote function
- Programmable dial button provides additional control over system functions
- Dial button can switch between presets and lock settings to prevent unwanted changes
- Two RJ45 Audio-Technica LINK ports support daisy-chaining multiple control panels
- Supports up to four ATCP-W02S panels from a single mixer using Cat5e or higher Ethernet cable
- ATDM-1012/1012DAN can power a daisy chain of four panels directly
- ATDM-0604a requires an ATLK-EXT25 link extender to power multiple panels (sold separately)
- Ideal for meeting rooms, classrooms, conference spaces, and other shared environments where users need direct access to everyday mixer controls

Description

The Audio-Technica ATCP-W02S elegantly places control where users need it most without mounting your SmartMixer on the wall. Along with a dedicated volume dial, this wall-mount panel provides two buttons for recalling presets and switching mixer-assigned channels on ATDM-0604a or ATDM-1012/1012DAN SmartMixers via a Web Remote function. A programmable dial button adds another layer of control, letting you switch between presets, then lock them when you want to keep settings from wandering.

Two RJ45 Audio-Technica LINK ports allow up to four ATCP-W02S panels to a single mixer using Cat5e or higher Ethernet cable. The ATDM-1012/1012DAN can daisy-chain four panels directly, while multiple panels connected to an ATDM-0604a require an ATLK-EXT25 link extender for power. It's a handy way to put everyday room controls where people need them.

Specifications


Power Supply	DC +8 to +48V (Audio-Technica LINK)
Power Consumption	1.2W
Operating Temperature Range	0 - 40°C
Operating Humidity Range	25 to 85% (no condensation)
Dimensions	86 mm x 60.7 mm x 86 mm
Weight	105 g
Indicator	Volume LED: 13 points (green) Buttons: 2 pcs (green/orange)
Link I/O	RJ-45 x 2 pcs (Audio-Technica LINK)






Connecting multiple control panels

- Use CAT5e or higher straight-through Ethernet cable.
- Use AWG 24 or larger straight-through Ethernet cable.
- Connect the product to ATDM-1012 Audio-Technica LINK A/B ports only.

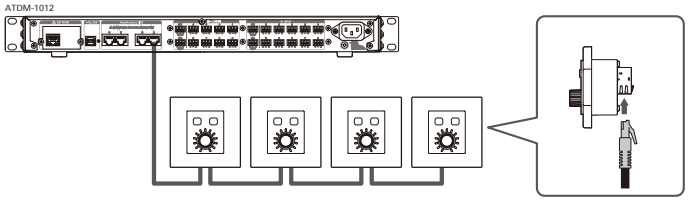

Dimensions

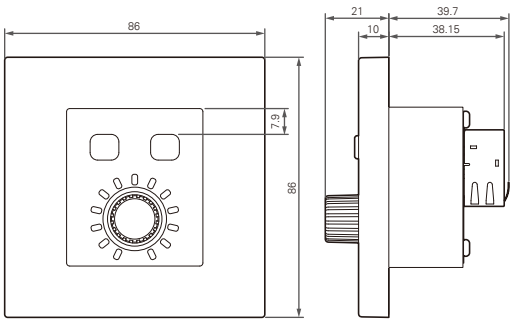

Audio-Technica Corporation
2-46-1 Nishi-naruse, Machida, Tokyo 194-8666, Japan
©2017 Audio-Technica Corporation
Global Support Contact: www.at-globalsupport.com

GENUINE ACCESSORIES



感谢您购买本产品。在使用产品之前，请全文浏览本用户手册以确保您将正确地使用本产品。请妥善保存本手册，以供将来参考。

■ 特性

- 适用于配合鈦三角 ATDM-0604a 和 ATDM-1012/1012DAN 数字式智能混音器的墙壁暗装音量控制面板
- 专用音量旋钮，便于直接进行电平控制
- 作为编程选择按钮，可快速调用已存储的混音器的编程配置
- 作为通道选择按钮，可通过 Web Remote 功能在混音器分配的通道之间切换
- 可编程旋钮按钮，为系统功能提供额外控制
- 旋钮按钮可在预设之间切换，并锁定设置以防止意外更改
- 两组 RJ45 型 Audio-Technica LINK 端口支持多个控制面板以菊花链连接
- 使用常规超五类或更高规格的以太网线，单台混音器可支持持四个 ATCP-W02S 面板
- ATDM-1012/1012DAN 可直接为多达四个面板组成的菊花链供电
- ATDM-0604a 需要加配 ATLK-EXT25 链路扩展器才能为多个面板供电
- 非常适合会客室、教室、会议场地及其他共享环境，满足用户直接操作日常混音器控制的需求

■ 说明

铁三角 ATCP-W02S 能够在最合适的位置提供美观、便捷的控制体验，无需将混音器本身挂墙安装。除了专用的音量旋钮外，这款嵌入式墙面面板还配备了两个功能按键，可通过 Web Remote 网页端调用预设，并无缝切换分配给 ATDM-0604a 或 ATDM-1012 / 1012DAN 数字智能混音器的对应通道。此外，可编程旋钮按键还丰富了控制层级，既支持在预设间灵活切换，也能在需要防止误操作时锁定设置。

面板背面设有两组 RJ45 型 Audio-Technica LINK 接口，使用标准的超五类 (Cat 5e) 或更高规格网线，单台混音器最多可连接四个 ATCP-W02S 面板。其中，ATDM-1012 / 1012DAN 支持直接以菊花链方式为四个面板供电，而连接至 ATDM-0604a 的多个面板则需加配 ATLK-EXT25 链路扩展器。这种设计能够将日常的空间控制功能精准布置在所需之处，带来极大便利。

■ 规格


供电	直流 +8 ~ +48V, 2.6A (Audio-Technica LINK 端口
能量消耗	1.2W
工作温度	0 ~ 40°C
工作湿度	25 ~ 85% (无冷凝)
尺寸	86mm 宽 x 60.7mm 深 x 86mm 高
重量	105 克
指示灯	音量指示：13 段 (绿灯) 按键：2 组 (绿灯/橙灯)
连接端口	RJ-45 x 2 组 (Audio-Technica LINK)






■ 多控制面板连接

- 请使用 CAT5e 或更高规格的直通以太网线。
- 请使用 AWG 24 或更粗线径的直通以太网线。
- 请将本产品连接至 ATDM-1012 的 Audio-Technica LINK A/B 端口。

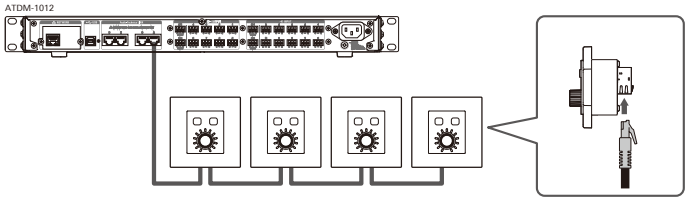

■ 尺寸

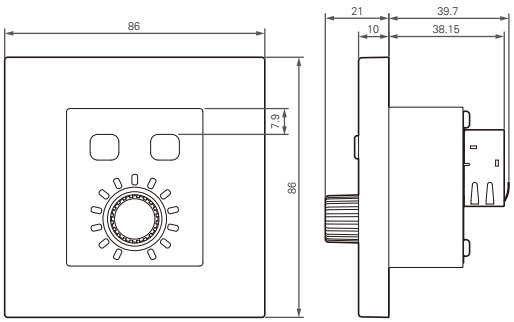

Audio-Technica Corporation
2-46-1 Nishi-naruse, Machida, Tokyo 194-8666, Japan
©2017 Audio-Technica Corporation
全球支持联系：www.at-globalsupport.com